

CANopen SERIES

TERMINAL 5"
TFT



CANmaster

General description

The Terminal with CAN-bus/CANopen communication is used for the CANmaster[®] control system as the basic system communication unit but can also be used as a stand-alone general terminal for other type of systems for monitoring and control.

The TFT graphical display has a resolution of 320x240 pixels. With CANmaster PC-TOOL[™] including the program Terminal Design[™], user defined menus and symbols are easily designed for the terminal to meet individual system requirements and customer needs.

The unit contains 3 digital inputs that can be user defined and is provided with a separate CAN-bus SAE J1939 port that can be used for integrated control and monitoring of external systems such as electronically controlled diesel engines and powershift gearboxes.

The terminal has an internal error log that is automatically transferred to the Master unit's central error log via the CAN-bus line. The central error log in the Master-unit can be viewed on the terminal display. 2 diagnostic LEDs in the front panel show the status for the CPU (green) and the CAN-bus (yellow) communication.

The Terminal is designed to be mounted in cab-environment, protected against rain and water splash.



Technical Data

General data

Supply Voltage	11-30 VDC
Operating temp.	-20° C to +60° C
Max. current required	0.5 A
Housing material	Aluminum profile/ ABS-PC plastics
EMC class	Automotive
Shock	IEC 60068-2-27 Es, 30g
Bump	IEC 60068-2-29 Eb, 10g
Vibration	IEC 60068-2-64, Random 10-250 Hz
Test level, IEC-tests	IEC 60721-3-5 Class 5M3
Weight	0.50 kg
Connector	AMP Multilock [®] 12 pin

Data communication

CAN-1	CANopen/CAN 2.0B, 500 kbps
CAN-2	CAN SAE J1939/CAN 2.0B, 250 kbps
PC-communication	USB 1.0

Display

Type	5" TFT 65K colour
Resolution	QVGA (324x240).
Brightness	500 cd/m ² , LED backlight
Buttons	Membrane, illuminated.

Ordering Information



TERMINAL 5" TFT compl.	Part No. 1020 2020
------------------------	--------------------

I/O data

I/O-type	Qty	Data
Digital input	0 - max 3	Digital input, +24 VDC

Programming tools
 Hydratronics CANmaster PC-TOOL[™]
 graphical programming tool including
 Terminal Design[™].


Connector pin assignments

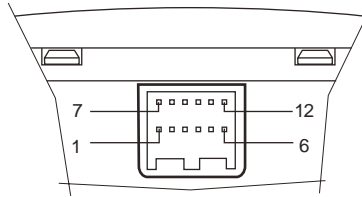

"A" Plug
(From the
USB Device)

Pin No.	Designation	Function
01	USB -	USB standard - White D + wire
02	USB +	USB standard - Green D - wire
03	Digital IN 00	user defined I/O-type
04	Digital IN 01	user defined I/O-type
05	Digital IN 02	user defined I/O-type
06	Vbatt GND	Power supply GND for Terminal, 0V
07	USB GND	USB standard - Black Ground wire
08	CAN1_L	CAN-bus signal L, CANopen
09	CAN1_H	CAN-bus signal H, CANopen
10	CAN2_L	CAN-bus signal L, CAN SAE J1939
11	CAN2_H	CAN-bus signal H, CAN SAE J1939
12	Vbatt SYS	Power supply input for Terminal, +24VDC

Prepared Termination

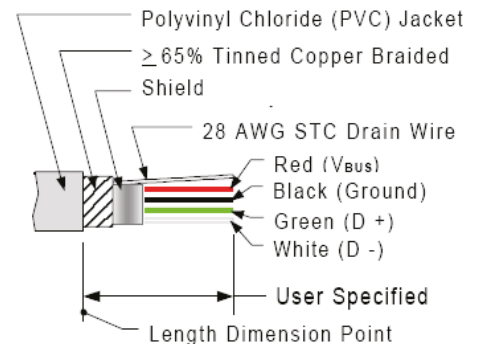

Don't connect Red Vbus wire

Mating connector specification

Mating connector	Data
AMP Multilock [®] , Part No.	174045-2
Hydratronics Part No.	5015 1004
Contacts AMP, type	Cu-Sn, 0.2 - 0.6 mm, ² 20-24 AWG
Loose contacts, AMP, Part no.	175062-1
Hydratronics Part No.	5015 1005
Crimp tool, AMP, Part No.	0-0091577-1
Hydratronics Part No.	5015 1009


(Mating connector not supplied with unit)

Accessories

Name	Part No.
Dashboard holder kit compl. including:	5010 1500
- Clamp	5010 1501
- Hex bolt, M4 x 20 (2x)	5010 1502
- Loch washer, DIN 6798A, 4.3 fzb (2x)	5010 9003
- Plastic knob, M4 (2x)	5010 1503

Reference Data Sheet No.: 2500 0006

Dimensions (mm)

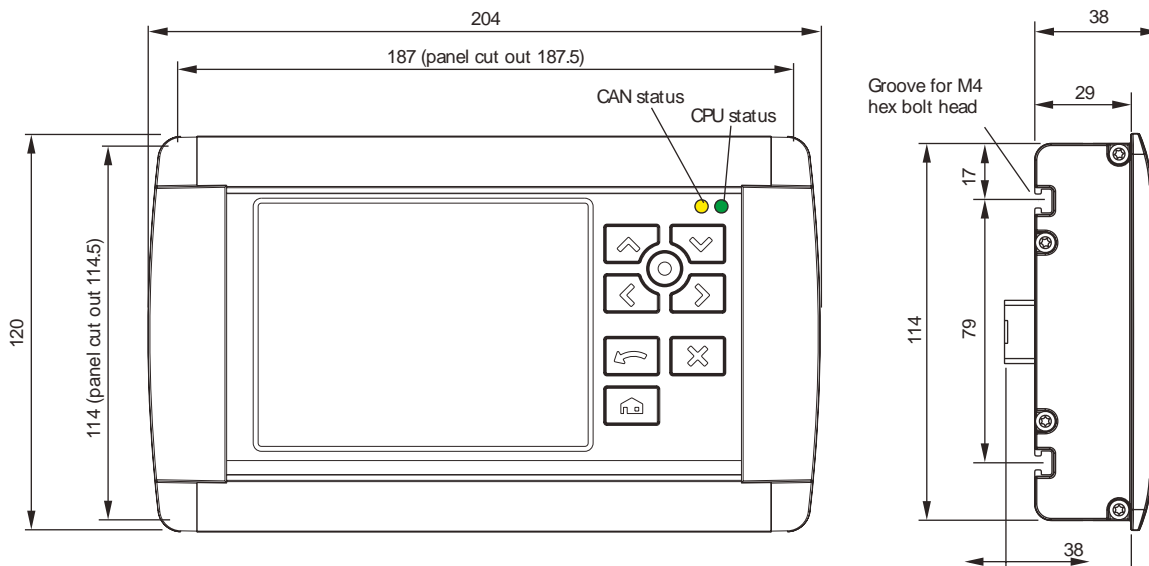

Supported by a worldwide network



CONTACT INFORMATION

EMEA

GERMANY	Hydreco Hydraulics GmbH, Straelen (NRW)	+49 283494303-41	info-de@hydreco.com
ITALY	Hydreco Hydraulics Italia Srl, Vignola (MO)	+39 059 7700411	sales-it@hydreco.com
NORWAY	Hydreco Hydraulics Norway AS, Nittedal	+47 22909410	post-no@hydreco.com
UK	Hydreco Hydraulics Ltd, Poole, Dorset	+44 (0) 1202 627500	info-uk@hydreco.com

AMERICAS

USA	Hydreco Inc, Rock Hill (SC)	+1 704 295 7575	sales-us@hydreco.com
LATIN AMERICA		+1 704 572 6266	sales-es@hydreco.com

APAC

AUSTRALIA	Hydreco Hydraulics Pty Ltd, Seven Hills (NSW)	+61 2 9838 6800	sales-au@hydreco.com
AUSTRALIA	Hydreco Hydraulics Pty Ltd, Smeaton Grange (NSW)	+61 2 4647 6577	au-smeatongrange@hydreco.com
AUSTRALIA	Hydreco Hydraulics Pty Ltd, Welshpool (WA)	+61 8 9377 2211	reception-wa@hydreco.com
INDIA	Hydreco Hydraulics India Private Ltd, Bangalore	+91 80 67656300	sales-in@hydreco.com